



Dry M 3Plus

SHRINKAGE COMPENSATING ADMIX

Dry M 3Plus is an inorganic powder, free from chlorides and any other dangerous component for mortars. It is mainly composed of special calcium oxide, thermally treated in a particular way and with a strictly selected grain size. The exclusive formulation allows to obtain shrinkage-controlled mortars with a fast increase of the initial mechanical strengths without no volumetric abnormalities or structural/superficial defects.

Admixture/Addition – Dry M 3Plus

Calcium oxide-based shrinkage reducing admixture with a stable effect over time, specific for R3 and R4 structural repair mortars; with the characteristics of increasing the mechanical strengths in short curing time periods, suitable for high performance and eco-friendly admixtures.



VOLUMETRIC CONTROL WITH NO SHRINKAGE ON HYPOTHETICAL TEST MORTAR


MIX DESIGN MALTA DI PROVA - TEST MORTAR MIX DESIGN					
Composizione - Composition	Unità di misura Units	1	2	3	4
Cem. II/A-LL 42,5R	kg/m3	430	430	430	430
Aggregato totale Total aggregate	kg/m3	300	300	300	300
Dry M 3Plus	% s.p.c. % b.w.o.c.	0,0	2,5	3,75	5,0
Acqua Water	kg/m3	205	205	205	205
Superfluidificante Superplasticizer	% s.p.c. % b.w.o.c.	1,0	1,0	1,0	1,0
A/C W/C	-	0,48	0,48	0,48	0,48

INCREASING IN MECHANICAL STRENGTH ON HYPOTHETICAL TEST MORTAR

Resistenze a compressione su malta di prova - Compressive strength on test mortar					
Stagionatura - Curing	Resistenza meccanica Mechanical strength	1	2	3	4
Giorni - Days		Cem. II/A-LL 42,5R	Dry M 3Plus - 2,5% s.p.c. (b.w.o.c.)	Dry M 3Plus - 3,75% s.p.c. (b.w.o.c.)	Dry M 3Plus - 5% s.p.c. (b.w.o.c.)
1	Rc - CS N/mm ²	4,88	10,94	12,63	19,69
2		22,13	25,25	28,00	30,06
3		29,63	34,63	38,75	38,38
7		31,13	39,00	42,81	46,69
14		38,31	42,50	46,00	51,25
28		40,81	46,06	52,13	58,31



VOLUMETRIC CONTROL WITH ABSENCE OF SHRINKAGE OF AN HYPOTHETICAL TEST MORTAR.

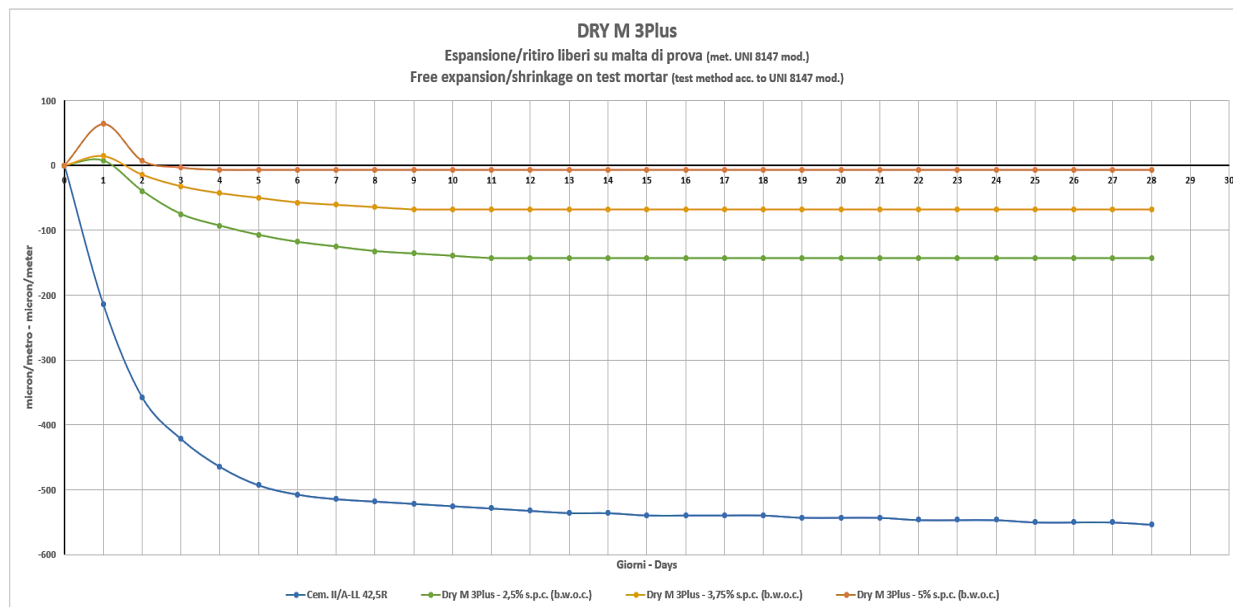

Characteristics

- Strong reduction of hygrometric shrinkage, with complete stability over time.
- Appreciable increase of the mechanical strength.
- Right to be used inside high-performance R3 and R4 structural repairs mortars (ref. EN 1504-3).

DOSAGE AND OPERATING INSTRUCTIONS

The dosage of the product depends on the characteristics we want to give to the final mortar. Normally it is between 2.5 and 10% by weight of cement. Dry M 3Plus can be added in the pre-mixing phase along with the cement and all the other additive as it is compatible with each component normally used when formulating cement products.

PACKAGING

The product is supplied
In bags kg. 20
big bags kg 750
bulk

STORAGE

DRY M 3PLUS must be stored in the original packages in a dry-covered place. For the purposes of quality, the shelf life of the product depends on the state of storage which under optimal conditions is not less than 12 months.

Chimica Edile s.r.l.

LOC. LA VALLE - VIA DEI MANISCALCHI snc
58043 CASTIGLIONE DELLA PESCAIA -GR-
ITALY -

Tel: +39 (0)564 935223

Mail: info@chimicaedile.it

